A brand of legrand

EXPRESS KIT SPEC GUIDE

For installation under carpet tile



Express Solution for Power & Data

Express Kits are a grab-and-go solution that conveniently manages both power and data cables. Our hidden under-carpet option works best under carpet tile for both retrofit and new construction applications.

Features & Benefits

Pre-Wired Power

Features a Receptacle Device that snaps into an Express Power Hub. This Hub is attached to a flexible steel conduit that is pre-wired for simple and quick installation.

Versatile Data

Data accommodates up to 8 Cat-6 data cables and holds up to 8 customizable keystone modules.


- Low-Profile Transition Ramps Ramps seamlessly transition the raceway to the floor and meet ADA compliance standards.
- Non-Disruptive Installation Easy to install and can be cut to size in the field, which allows more work during regular business hours.
- Multiple Entrance Fitting Options.
 Draw power from either the standard, in-wall entrance fitting, or draw power from Wiremold[®] Perimeter Raceways, using Raceway-to-Connectrac Transitions.

CONNECTRAC.

EXPRESS KIT SPEC GUIDE

For installation under carpet tile



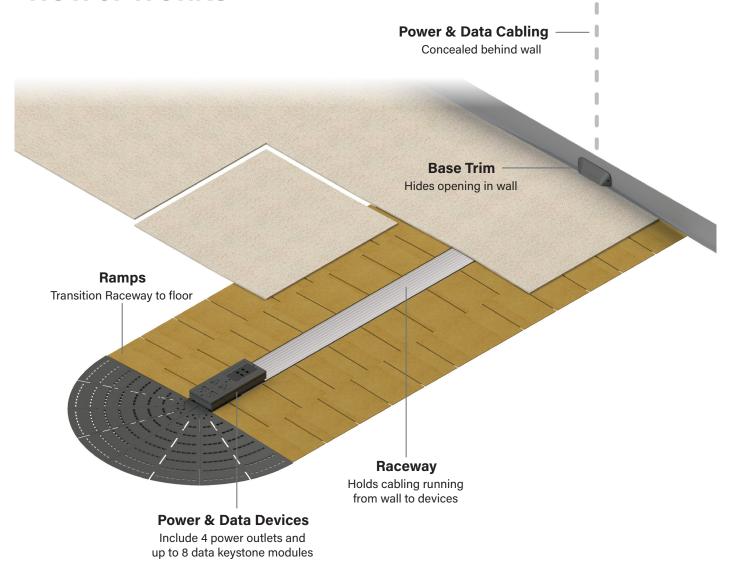


Total System Width: 34" Total System Height: .65" Maximum Raceway Length: 15' CONNECTRAC.

A brand of **🛛 legrand**®

EXPRESS KIT SPEC GUIDE

For installation under carpet tile

COMPONENTS

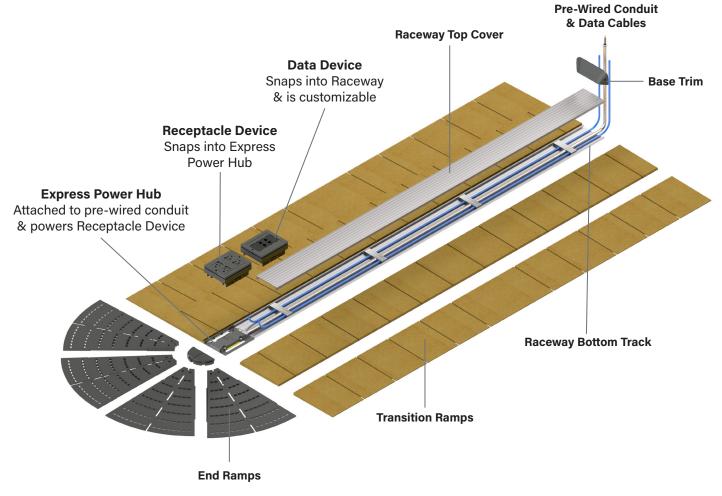

PRODUCT LISTING

Our Express Kit for installation under carpet tile is a grab-and-go solution that comes complete with all the accessories you need for installation.

To specify, simply start with a 6' Express Kit and add on 3' extensions to reach your desired raceway length. Recommended not to exceed 15', as conduit is 25'.

Part NumberDescriptionCT.XP.1-06-25.1c6' EXPRESS under carpet kit w/ 25' single circuit conduit, quad receptacle & data deviceCT.XP.1-EXT-033' Raceway Extension w/ non-powered raceway, tracks, & ramps

CONNECTRAC.

A brand of La legrand

EXPRESS KIT SPEC GUIDE

For installation under carpet tile

OPTIONAL ACCESSORIES


90° CORNER KIT

Allows Raceway to make a 90° turn.





Description: EXPRESS under carpet CORNER. 90 degree complete kit




5" 0.08"

HUBCAP

Covers raceway in lieu of device

Part Number: CT.C.DHC.1-FX-DG

Description: Device Hubcap



Description:

Allows cables to enter/

A/V DEVICE

Part Number:

CT.C.DT3.1-DG

Description:

GROMMET

exit the raceway.

Part Number:


CT.C.DT1F.1-DG

A/V Device

Holds any standard

double-gang faceplate.

Data Device Grommet




WALL CHANNEL KIT

The Wall Channel Kit comes in two sizes (2, 12') and is used when power/data cabling is running outside the wall. The 2' Wall Channel Kit is designed to connect to an existing wall outlet box, while the 12' Wall Channel Kit is designed for running conduit up the wall to connect to a junction box. Both sizes can be cut to size in the field.

Part Number:

CT.XP-AC-WT-02-SV CT.XP-AC-WT-12-SV Description:

2' Wall Channel Kit 12' Wall Channel Kit




VERTICAL WIRE MANAGER

Attaches to any power or data device to manage cabling.

Part Number: CT.AC-WMV.1-DG

Description: Vertical Wire Manager



ROUGH-IN FRAME


Installed before drywall to provide a rough opening for cabling.

Part Number: CT.AC-RIF.1

Description: Rough-In Frame

For installation under carpet tile


WIREMOLD® RACEWAY TRANSITIONS

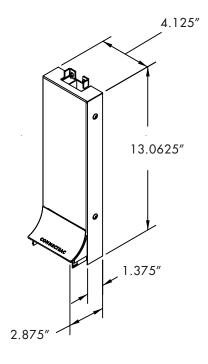

2400D[®] Series Raceway Transition

The Raceway Transition Fitting allows the feeding of power and data to the wireway from a 2400D[®] Series Raceway mounted on a wall. The steel constructed transition is available in either a painted Ivory finish or Fog White finish to match the on-wall raceway.

Part Number:	Description:
V2400CT1	2400D Raceway-to-Connectrac
	Transition Fitting. Surface-mounted. Ivory
FW2400CT1	2400D Raceway-to-Connectrac Transition Fitting. Surface-mounted. Fog White



4000° Series Raceway Transition

The Raceway Transition Fitting allows the feeding of power and data to the wireway from a 4000° Series Raceway mounted on a wall. The steel constructed transition is available in either a painted Ivory finish or Gray finish to match the on-wall raceway.

Part Number:	Description:
G4000CT1	4000 Raceway-to-Connectrac Transition Fitting. Surface-mounted. Gray
V4000CT1	4000 Raceway-to-Connectrac Transition Fitting. Surface-mounted. Ivory

For installation under carpet tile

RECEPTACLE DEVICE


These components are included with each quad device:

DEVICE COVER _

Attaches to top of Receptacle Device

RECEPTACLE DEVICE

Snaps into Express Power Hub

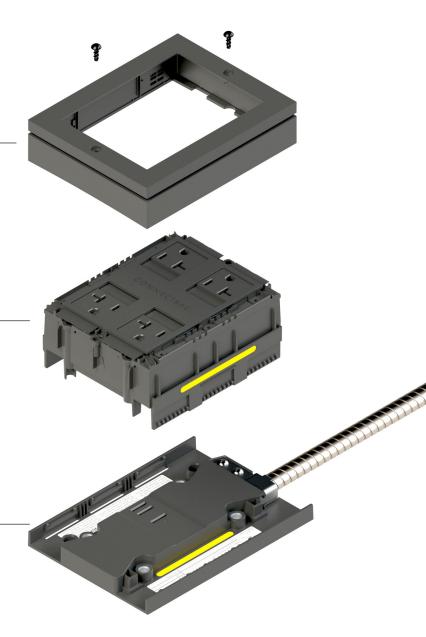

EXPRESS POWER HUB -

Provides power to Receptacle Device and is attached to a flexible steel conduit that is pre-wired


NAME:	Receptacle Device	
DESCRIPTION:	The Receptacle Device is a 20-amp quad power device available in a single-circuit option.	5" Contract Contract Contrac
ELECTRICAL LISTING:	US: This device meets UL 111 standards for multioutlet assemblies.	4"
	Canada: This device meets CAN/CSA 22.2 No. 62 standards for surface raceway systems.	and a second



For installation under carpet tile

DATA DEVICE

These components are included with each data device:

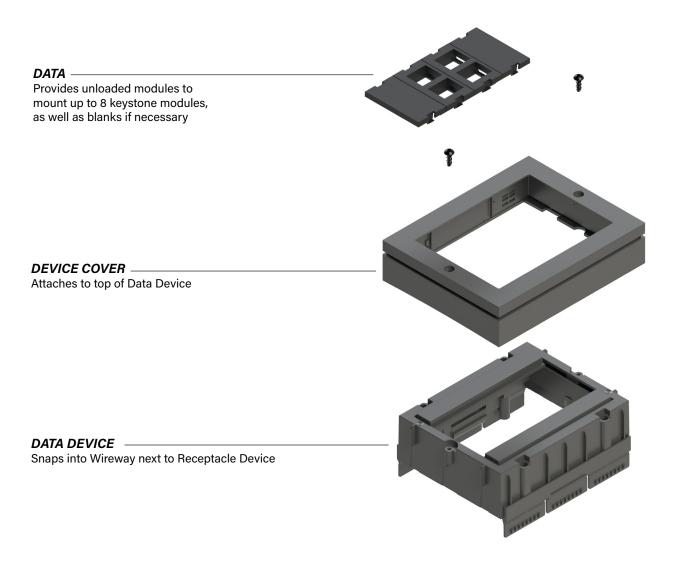


DEVICE INFORMATION	
NAME:	Data Device
DESCRIPTION:	The Data Device is customizable and fits up to 8 keystone modules.


TECHNICAL INFO

RACEWAY CAPACITY

Alongside the shielded flexible power conduit, the Raceway can accomodate up to 8 low-voltage cables (data, telecom, AV):

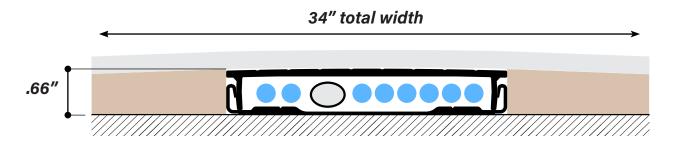

RACEWAY DIMENSIONS




WEIGHT CAPACITY

Connectrac systems are designed to withstand loads up to 1000 pounds.

WIRING DIAGRAM


Express Kits are single-circuit, pre-wired systems. The flexible conduit includes a 1/2" knockout fitting and typically connects to a junction box in the wall or ceiling.

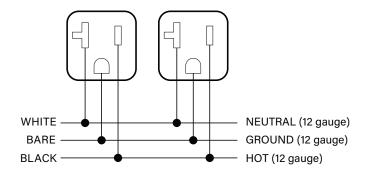

For installation under carpet tile

PARTS LIST - RACEWAY

EXPRESS HUB

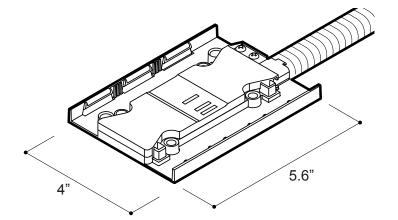

Specifications

Material PC Plastic

Country of Origin Taiwan

Compliance cULus Listed to US & Canadian Safety Standards

Description

An Express Hub provides power access to the Express Receptacle Device. It comes pre-wired with an attached length of metallic flexible conduit to convert mains building power to the Express power system.


Associated Part Number	Description
CT.03-XP-HB.1-25.1c	EXPRESS POWER HUB w/ 25' attached conduit. Single circuit.

(continued on next page)

For installation under carpet tile

PARTS LIST - RACEWAY

POWER / DATA CHANNEL

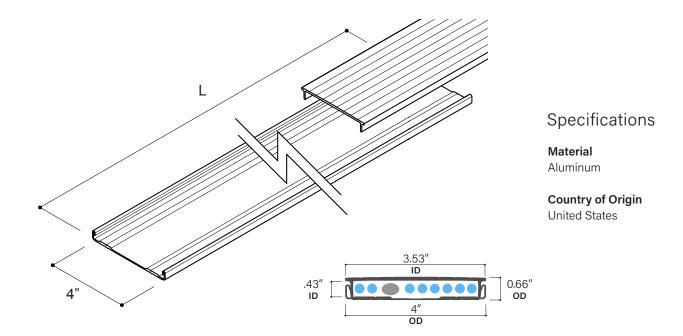

Description


Power/Data Channels are comprised of Top Covers and Bottom Tracks. Top Covers conceal and protect the power and data cabling, and are completely hidden under carpet tile. Bottom tracks are fastened to the floor, house the power and data cabling, and are available in various lengths (L). Each bottom track typically holds up to 8 cables.

Associated Part Number	Description
CT.01-DT.1-03	3' DATATRAC.
CT.01-DT.1-027	2' 6.5" [30.5"] DATATRAC.
CT.01-TC-FX.1-005	5" TOP COVER: FLEX/EXPRESS.
CT.01-TC-FX.1-022	2.25' [26.25"] TOP COVER: EXPRESS.
CT.01-TC-FX.1-03	3' TOP COVER: FLEX/EXPRESS.

For installation under carpet tile

PARTS LIST - DEVICES


RECEPTACLE DEVICE

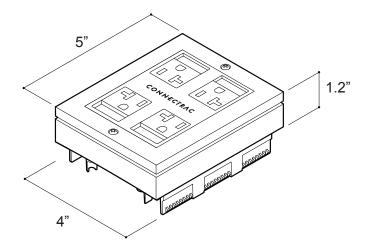

Description

Express power devices quickly snap into any Express Hub. A Receptacle Device is a NEMA 5-20R quad power device available in various 4-circuit options.

DATA DEVICE



Specifications

Material PC Plastic

Color Dark Gray

Country of Origin Taiwan

Compliance cULus Listed to US & Canadian Safety Standards

Specifications

Material PC Plastic

Color Dark Gray

Country of Origin China

Description


Data devices easily snap into the raceway and are positioned next to the Receptacle Device. The Data Device is customizable and fits up to 8 low-voltage keystone modules.

Associated Part Number	Description
CT.C.PW1.1-Q11-DG	POWER DEVICE 1. RECEPTACLE. 20A quad outlet. All circuit 1. DARK GRAY
CT.C.DT2.1-DG	DATA DEVICE 2. DATA DEVICE. Fits up to (8) keystone modules. DARK GRAY.

For installation under carpet tile

PARTS LIST - RAMPS

END RAMPS

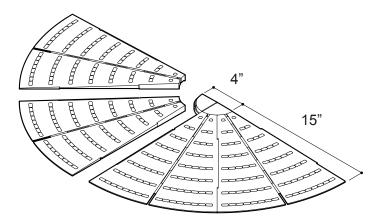

Specifications

Material PC Plastic

Country of Origin China


Compliance

cULus Listed to US & Canadian Safety Standards

Description

End Ramps sit at the end of the raceway channel, and help to transition the flooring material from the raceway to the surrounding flooring.

SIDE RAMPS



Specifications

Material Moisture-resistant MDF

Country of Origin United States

Description

Transition Ramps sit adjacent to a raceway, and help to transition the flooring material from the raceway to the surrounding flooring.

Associated Part Number	Description
CT.02-FM-ER.1	END RAMP: FLEX/FLEX-MAX end-of-raceway transition ramps.
CT.02-FM-SRS.1-03	3' SIDE RAMP SET: FLEX/FLEX-MAX. (2) 3' sets. [6 linear feet/3' per side].
CT.02-FM-SRS.1-06	6' SIDE RAMP SET: FLEX/FLEX-MAX. (2) 6' sets. [12 linear feet/6' per side].